



LOCTITE[®] H8500[™]

July 2009

PRODUCT DESCRIPTION

LOCTITE[®] H8500[™] provides the following product characteristics:

Technology	Acrylic
Chemical Type	Methacrylate
Appearance (Part A)	Off-white, viscous paste
Appearance (Part B)	Black viscous liquid
Appearance (Mixed)	Grey viscous paste ^{LMS}
Components	Two component - requires mixing
Mix Ratio, by volume - Part A: Part B	10 : 1
Cure	Room temperature cure
Application	Bonding

LOCTITE[®] H8500[™] is a thixotropic, two-component, room temperature curing methacrylate adhesive offering superior peel and impact strength on steel and aluminum. LOCTITE[®] H8500[™] contains 0.75mm spacer beads to help prevent excessive squeeze-out of adhesive due to over-clamping.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Part A:

Specific Gravity @ 25 °C 0.98

Flash Point - See MSDS

Viscosity, Cone & Plate, 25 °C, mPa·s (cP):

Cone CP50-1 @ shear rate 50 s⁻¹ 8,200

Viscosity, Brookfield - HBD, 25 °C, mPa·s (cP):

Spindle 5, speed 20 rpm 35,000 to 60,000

Part B:

Specific Gravity @ 25 °C 0.96

Flash Point - See MSDS

Viscosity, Cone & Plate, 25 °C, mPa·s (cP):

Cone CP50-1 @ shear rate 50 s⁻¹ 8,000

Viscosity, Brookfield - HBD, 25 °C, mPa·s (cP):

Spindle 4, speed 20 rpm 10,000 to 30,000

Mixed:

Specific Gravity @ 25 °C 0.99

Flash Point - See MSDS

Working Time @ 25 °C, minutes
(maximum time before assembly):

Steel 25

Aluminium 25

Polyethylene 20

Working life, minutes
(Time for mixed viscosity to double) 10

TYPICAL CURING PERFORMANCE

Fixture Time

Fixture time is defined as the time to develop a shear strength of 0.1 N/mm².

Fixture Time, ISO 4587, minutes:

Grit Blasted Mild Steel	25 to 30
Aluminum	4.5 to 5
Polycarbonate	45 to 50


Peak Exotherm Temperature

Peak Exotherm Temperature, 10 gram mass, minutes:

@ 127 °C 39

Cure Speed vs. Time

The graph below shows the shear strength developed over time at 22 °C / 50 % RH on mild steel (grit blasted) and tested according to ISO 4587.

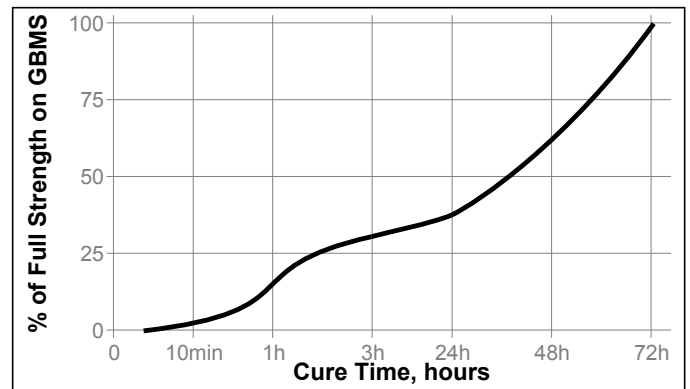

TYPICAL PROPERTIES OF CURED MATERIAL

Physical Properties:

Glass Transition Temperature (T _g), ISO 11359-2, °C	98
Coefficient of Thermal Expansion, ISO 11359-2 K ⁻¹ :	
Pre T _g	98×10 ⁻⁰⁶
Post T _g	258×10 ⁻⁰⁶
Shore Hardness, ISO 868, Durometer D	70
Linear Shrinkage, %	4.4
Volume Shrinkage, %	12
Elongation, at break, ISO 527-2, %	28
Elongation, at yield, ISO 527-2, %	3
Tensile Strength, at yield, ISO 527-2	N/mm ² 15 (psi) (2,160)
Tensile Strength, at break, ISO 527-2	N/mm ² 17 (psi) (2,430)
Tensile Modulus, ISO 527-2	N/mm ² 1,112 (psi) (161,200)



TYPICAL PERFORMANCE OF CURED MATERIAL**Adhesive Properties**

Cured for 24 hours @ 25 °C followed by 18 minutes @ 110 °C

Lap Shear Strength, ISO 4587:

Steel	N/mm ²	≥15 ^{LMS}
	(psi)	(≥2,175)

Cured for 72 hours @ 22 °C.

Impact Strength, ISO 9653, J:

Grit Blasted Mild Steel (GBMS)	>14
Aluminum (abraded)	11
FRP	>7
Grit Blasted Mild Steel (GBMS) @ -40 °C	>14
FRP @ -40 °C	6

"T" Peel Strength, ISO 11339:

Steel	N/mm	16
	(lb/in)	(92)
Aluminum	N/mm	9
	(lb/in)	(51)

Block Shear Strength, ISO 13445:

Ferrite Magnet to Steel	N/mm ²	20
	(psi)	(2,970)

Lap Shear Strength, ISO 4587:


Grit Blasted Mild Steel (GBMS)	N/mm ²	26
	(psi)	(3,780)
Aluminum	N/mm ²	15
	(psi)	(2,180)
Aluminum (roughened to 41 rms)	N/mm ²	19
	(psi)	(2,780)
Stainless Steel	N/mm ²	23
	(psi)	(3,410)
Galvanized Steel	N/mm ²	15
	(psi)	(2,210)
FRP	N/mm ²	10
	(psi)	(1,410)
Gelcoat	N/mm ²	6
	(psi)	(850)
Polycarbonate	N/mm ²	3
	(psi)	(450)
PVC	N/mm ²	4
	(psi)	(540)
ABS	N/mm ²	2
	(psi)	(260)
Epoxy	N/mm ²	7
	(psi)	(1,020)
Acrylic	N/mm ²	3
	(psi)	(430)
Glass	N/mm ²	2
	(psi)	(370)

TYPICAL ENVIRONMENTAL RESISTANCE

Cured for 72 hours @ 22 °C

Lap Shear Strength, ISO 4587:

Grit Blasted Mild Steel (GBMS)

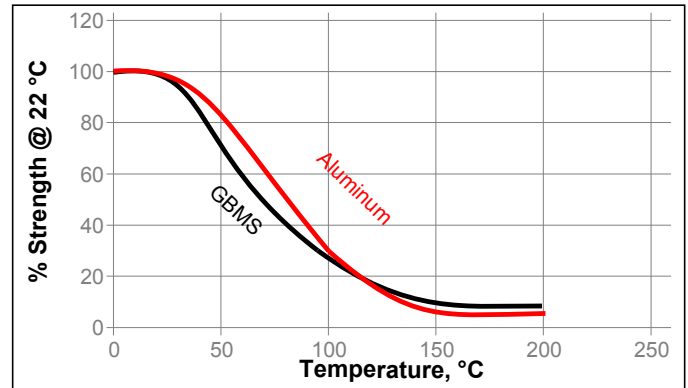Hot Strength**Heat Aging**

Aged at temperature indicated and tested @ 22 °C

Temperature, °C	% of initial strength	
	500h	1000h
GBMS		
100	100	85
177	30	30
205	5	5
Aluminum		
100	135	100
177	45	40
205	15	15
Galvanized Steel		
100	100	100
177	25	15

Chemical/Solvent Resistance

Aged under conditions indicated and tested @ 22 °C.

Environment	°C	% of initial strength	
		500 h	1000 h
Air	87	130	120
Motor oil (10W30)	87	85	85
Unleaded gasoline	87	45	30
Water/glycol 50/50	87	90	75
Water	22	100	85
Acetone	22	25	15
Isopropanol	22	100	100
95% RH	40	100	100
100% RH	49	80	75
Salt fog	22	80	80
Salt Fog on Al	38	100	100
Salt Fog on Galvanized Steel	38	75	75
100%RH on Al	49	100	100
100%RH on Galvanized Steel	49	75	75

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials

For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).

Directions for use:

1. For high strength structural bonds, remove surface contaminants such as paint, oxide films, oils, dust, mold release agents and all other surface contaminants.
2. Use gloves to minimize skin contact. DO NOT use solvents for cleaning hands.
3. **Dual Cartridges:** To begin using a new cartridge, remove cartridge cap and dispense a small amount of adhesive, making sure both parts A&B are extruding. Attach nozzle and dispense approximately 25 to 50mm, before applying onto part to be bonded. Partially used cartridges can be stored with the mixing nozzle attached. To reuse, remove and discard old nozzle, attach the new nozzle, dispense approximately 25 to 50mm, before applying onto part to be bonded.
Bulk Containers: Normally material is dispensed through volumetric metered mixing equipment, attached to static mix nozzles.
4. For maximum bond strength apply adhesive evenly to both surfaces to be joined.
5. Application to the substrates should be made as soon as possible. Larger quantities and/or higher temperatures will reduce the working time.
6. Join the adhesive coated surfaces and allow to cure. Higher temperatures will speed up curing.
7. Keep assembled parts from moving during cure. The bond should be allowed to develop full strength before subjecting to any service load.
8. Excessive uncured adhesive can be cleaned up with ketone type solvents.

Loctite Material Specification^{LMS}

LMS dated June 03, 2008. Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Quality.

Storage

The product is classified as flammable and must be stored in an appropriate manner in compliance with relevant regulations. Do not store near oxidizing agents or combustible materials. Store product in the unopened container in a dry location. Storage information may also be indicated on the product container labelling.

Optimal Storage: 2 °C to 8 °C. Storage below 2 °C or greater than 8 °C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$
 $\text{kV/mm} \times 25.4 = \text{V/mil}$
 $\text{mm} / 25.4 = \text{inches}$
 $\mu\text{m} / 25.4 = \text{mil}$
 $\text{N} \times 0.225 = \text{lb}$
 $\text{N/mm} \times 5.71 = \text{lb/in}$
 $\text{N/mm}^2 \times 145 = \text{psi}$
 $\text{MPa} \times 145 = \text{psi}$
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$
 $\text{mPa}\cdot\text{s} = \text{cP}$

Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 0.5